



# IBIZA

Innovative Spot Merchandiser. Ready to plug-in.



**SMALL FOOTPRINT**  
**INCREASED VISIBILITY**  
**MAXIMUM SALES PROMOTION**

# MODERN TECHNOLOGY WITH BRILLIANT DESIGN.

The energy efficient IBIZA impresses with smart, up-to-date technical features.

## KEY BENEFITS


- Optimal view of merchandise through condensation-preventing glass panes on all sides
- Improved ease of use due to automatic defrost and easy-to-clean plastic liner
- Durable sliding glass lids (lockable)
- Interior price labeling close to the products

## OPTIONS

- Baskets and compartment separators
- Attractive LED interior lighting

MULTI-MODE CABINET (MT,LT,IC) IBIZA 100 NAM				
		Medium Temperature IAT*	Low Temperature IAT*	Ice Cream Freezer IAT*
Net Content	cu.ft	2.59	4	6.65
Total Display Area	sq.ft	6.32		
Adjustment Temperature Range	°F .. °F	From +28 to 47	From -2.2 to +8.6	From -22 to -5.8
Nominal Power Consumption Cabinet	W	350		
Nominal Current	A	6.9		
Energy Consumption kWh	kWh/24h	1.22	2.25	3.95
Refrigerant Type		R290		
Nominal voltage/frequency		V/Hz		
		110 – 120/60		
Physical dimensions				
Length outside/inside	inch	39.37/34.33		
Depth outside/inside	inch	33.5/28.46		
Front access height/height outside	inch	35.43/36.42		
height inside front/rear	inch	29.25		
Stacking height (is basket height for meat colling)	inch	9.84	14.17	19.69
MULTI-MODE CABINET (MT,LT,IC) IBIZA 145 NAM				
		Medium Temperature IAT*	Low Temperature IAT*	Ice Cream Freezer IAT*
Net Content	cu.ft	5.3	7.9	12.07
Total Display Area	sq.ft	9.62		
Adjustment Temperature Range	°F .. °F	From +28 to 47	From -2.2 to +8.6	From -22 to -5.8
Nominal Power Consumption Cabinet	W	400		
Nominal Current	A	7.6		
Energy Consumption kWh	kWh/24h	1.64	2.77	4.79
Refrigerant Type		R290		
Nominal Voltage/Frequency		V/Hz		
		110 – 120/60		
Physical dimensions				
Length outside/inside	inch	57.32/52.28		
Depth outside/inside	inch	33.5/28.46		
Front access height/height outside	inch	35.43/36.42		
Height inside front/rear	inch	29.25		
Stacking height (is basket height for meat colling)	inch	9.84	14.17	19.69

\* Internal Average Temperature

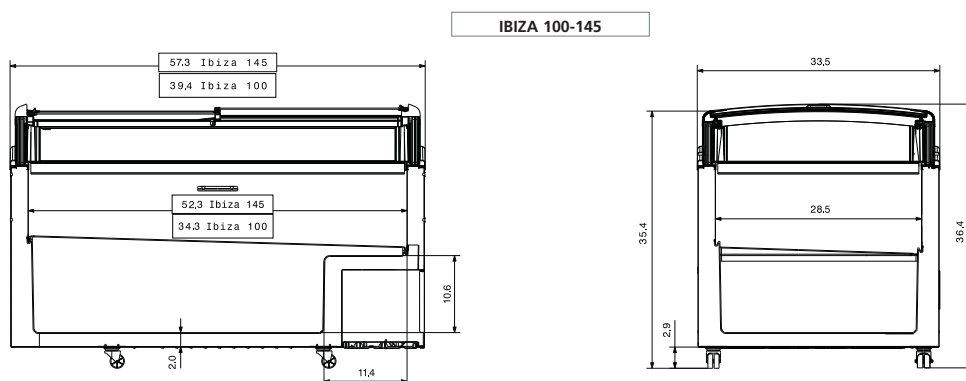

NEMA Plug Type: L5-15 P



approved according to ANSI/NSF 7  
approved according to ANSI/UL 471

**AHT**  
green . freshness . worldwide

OHSAS 18001  
SA 8000

ISO 9001  
ISO 14001